

Single relay - REL-MR-BL-24DC/21HC/MS - 2908180

Rețineți că datele furnizate aici sunt luate din catalogul online. Pentru informații și date complete, consultați documentația de utilizare. În cazul descărcărilor de pe internet se aplică Termenii și condițiile de utilizare generale. (<http://download.phoenixcontact.de>)



Plug-in miniature relay, with power contact, 1 changeover contact, test button, mechanical switch position indicator, polarity: bipolar, input voltage: 24 V DC

RoHS

Date comerciale

Unitate de ambalare	10 buc
Cantitate minimă pentru comandă	10 buc
GTIN	 4 055626 277899
GTIN	4055626277899
Greutate pe bucată (fără ambalaj)	18,000 g
Cod tarif vamal	85364190
#ara de origine	China

Date tehnice

Dimensions

Width	13 mm
Height	29 mm
Depth	25.5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	RT II
	RT II

Coil side

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.8 ... 2.2 (see diagram)
Typical input current at U_N	17 mA

Single relay - REL-MR-BL-24DC/21HC/MS - 2908180

Date tehnice

Coil side

Typical response time	9 ms
Typical release time	6 ms
Power dissipation for nominal condition	0.41 W

Contact side

Contact type	1 PDT
Type of switch contact	Single contact
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V (at 10 mA)
Min. switching current	10 mA (at 12 V)
Maximum inrush current	32 A (20 ms)
Limiting continuous current	16 A
Interrupting rating (ohmic load) max.	384 W (at 24 V DC)
	62 W (at 48 V DC)
	48 W (at 60 V DC)
	53 W (at 110 V DC)
	66 W (at 220 V DC)

General

Test voltage relay winding/relay contact	5 kV AC (50 Hz, 1 min.)
Operating mode	100% operating factor
Degree of protection	RT II
Mechanical service life	5x 10 ⁶ cycles
Service life, electrical	see diagram
Mounting position	any

Connection data

Connection method	Solder connection
-------------------	-------------------

Standards and Regulations

Standards/regulations	IEC 61810
	IEC 60664
Rated insulation voltage	250 V AC
Degree of pollution	2
Overvoltage category	III


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Desene

Single relay - REL-MR-BL-24DC/21HC/MS - 2908180

Diagram

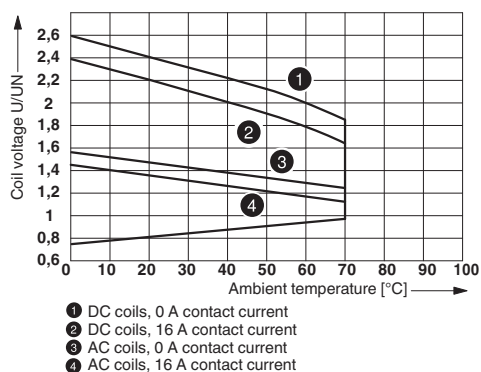


Diagram

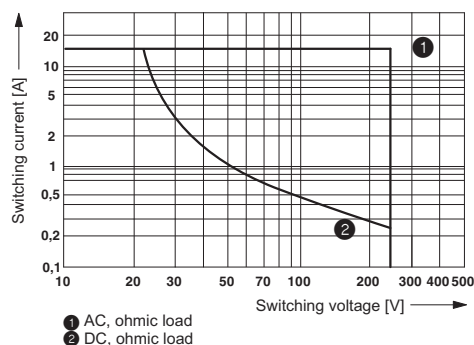


Operating voltage range

Interrupting rating

Diagram

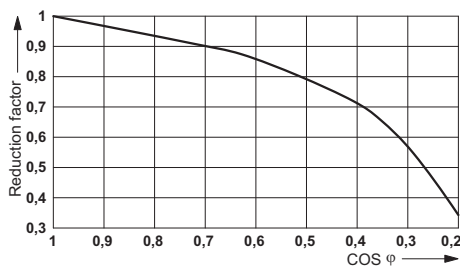

Circuit diagram

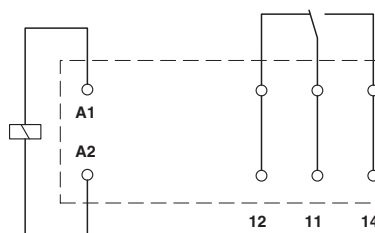

Service life reduction factor with various cos phi

Clasificări

eCl@ss

eCl@ss 5.0	27371601
eCl@ss 5.1	27371600
eCl@ss 6.0	27371600
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601
eCl@ss 9.0	27371601

ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437
ETIM 6.0	EC001437
ETIM 7.0	EC001437

Single relay - REL-MR-BL-24DC/21HC/MS - 2908180

Clasificări

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39122334

Aprobări

Aprobări

Aprobări

UL Recognized / cUL Recognized / EAC / cULus Recognized

Aprobări EX

Detalii de aprobare

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 195083
---------------	--	---	---------------

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 195083
----------------	--	---	---------------

EAC			RU C- DE.A*30.B.01082
-----	--	--	--------------------------

cULus Recognized			
------------------	--	--	--

Accesorii

Produse complementare

Single relay - REL-MR-BL-24DC/21HC/MS - 2908180

Accesorii

Relay base - RIF-1-BPT/2X21 - 2900931



RIF-1... relay base, for miniature power relay with 1 or 2 PDTs or solid-state relays of the same design, push-in connection, plug-in option for input/suppressor modules, for mounting on NS 35/7,5

Relay base - RIF-1-BSC/2X21 - 2900930



RIF-1... relay base, for miniature power relay with 1 or 2 changeover contacts or identical solid-state relays, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5
